



# ACCESSORIES

## ACCESSORIES

We offer many different accessories, such as clamps, and wraps; for tubing bundles or electric wiring, gauges, manifolds, pressure indicators, and tubing. These items are in various applications including medical devices, industrial assemblies, fluid or water distribution, and securing tube lines.



# CLIPS, CLAMPS, & WRAPS

## **CLAMPS CLIPS AND WRAPS**

Looking for reliable tubing accessories? Discover our wide range of clips and wraps designed to make your setup cleaner, safer, and more efficient!

## OCPD SERIES- PINCH CLAMPS



OCPD Series are Double-eared pinch clamps that are suitable for securing both air and liquid lines. They are made of 304 Stainless Steel and offer a fast, simple, and secure installation. The 2-eared design gives an increased clamping range. They also come available in Zinc plated.

SKU	DESCRIPTION
OCPD-8	1/8" Double-Ear clamp Stainless Steel
OCPD-9	9/64" Double-Ear clamp Stainless Steel
OCPD-10	5/32" Double-Ear clamp Stainless Steel
OCPD-11	11/64" Double-Ear clamp Stainless Steel
OCPD-12	3/16" Double-Ear clamp Stainless Steel
OCPD-16	1/4" Double-Ear clamp Stainless Steel
OCPD-20	5/16" Double-Ear clamp Stainless Steel
OCPD-24	3/8" Double-Ear clamp Stainless Steel
OCPD-28	7/16" Double-Ear clamp Stainless Steel
OCPD-32	1/2" Double-Ear clamp Stainless Steel
OCPD-36	9/16" Double-Ear clamp Stainless Steel
OCPD-38	19/32" Double-Ear clamp Stainless Steel
OCPD-40	5/8" Double-Ear clamp Stainless Steel
OCPD-48	3/4" Double-Ear clamp Stainless Steel
OCPD-52	13/16" Double-Ear clamp Stainless Steel
OCPD-56	7/8" Double-Ear clamp Stainless Steel
OCPD-60	15/16" Double-Ear clamp Stainless Steel

## OCPS SERIES - PINCH CLAMPS



These single-eared 304 Stainless Steel Pinch Clamps can be used for securing tubing, hoses, electric cables, and welding hoses. The closed ear offers a fast, simple, and secure installation. When clamped, they provide a visual confirmation that the clamp is closed.

SKU	DESCRIPTION
OCPS-8	1/8" Single-Ear clamp Stainless Steel
OCPS-9	9/64" Single-Ear clamp Stainless Steel
OCPS-10	5/32" Single-Ear clamp Stainless Steel
OCPS-12	3/16" Single-Ear clamp Stainless Steel
OCPS-14	7/32" Single-Ear clamp Stainless Steel
OCPS-16	1/4" Single-Ear clamp Stainless Steel
OCPS-18	9/32" Single-Ear clamp Stainless Steel
OCPS-20	5/16" Single-Ear clamp Stainless Steel
OCPS-21	21/64" Single-Ear clamp Stainless Steel
OCPS-24	3/8" Single-Ear clamp Stainless Steel
OCPS-25	25/64" Single-Ear clamp Stainless Steel
OCPS-28	7/16" Single-Ear clamp Stainless Steel
OCPS-30	15/32" Single-Ear clamp Stainless Steel
OCPS-32	1/2" Single-Ear clamp Stainless Steel
OCPS-35	35/64" Single-Ear clamp Stainless Steel
OCPS-36	9/16" Single-Ear clamp Stainless Steel
OCPS-40	5/8" Single-Ear clamp Stainless Steel
OCPS-44	11/16" Single-Ear clamp Stainless Steel
OCPS-46	23/32" Single-Ear clamp Stainless Steel
OCPS-48	3/4" Single-Ear clamp Stainless Steel

## LTC SERIES - CLIPS



Acetal Clips are used with push-in fittings to secure the tubing from disconnecting. Used with Acetal and Polypropylene push-to-connect fittings in the food and beverage industry. for water and beverage dispensing. The outside dimensions of the tubing for these clips are 1/4", 5/16", 3/8", and 1/2". The temperature range is -4° F to 150° F. The pressure range is 145 psi to 230 psi. They are available in various colors; Red or Blue, also in metric sizes.

SKU	DESCRIPTION
LTC-3B	3/16" OD Acetal Locking Clip
LTC-4B	1/4" OD Acetal Locking Clip
LTC-5B	5/16" OD Acetal Locking Clip
LTC-6B	3/8" OD Acetal Locking Clip
LTC-8B	1/2" OD Acetal Locking Clip
LTC-5M	5 mm OD Acetal Locking Clip
LTC-8M	8 mm OD Acetal Locking Clip
LTC-10M	10 mm OD Acetal Locking Clip
LTC-12M	12 mm OD Acetal Locking Clip
LTC-15M	15 mm OD Acetal Locking Clip

## TCC SERIES



TCC Series Plastic Tube Clips are available for 3/8", 1/4", or 1/2" OD tubing and are sold as a single clip of 6, 7, or 10 channels. Also, they can be mounted with screws on each end. Furthermore, they can also be cut for custom installations.

SKU	DESCRIPTION
TCC-14-2	1/4" 2 Channel
TCC-38-7	3/8" 7 Channel
TCC-38-10	3/8" 10 Channel
TCC-12-6	1/2" 6 Channel

## PCR SERIES



PCR Series Tube Racks come with 5, 7, or 10 channels to accommodate OD tubing sizes of 1/4", 5/32", or 3/16" with the ability to be separated into smaller sections. In addition, the Tube Racks come in an assortment of colors with Black being standard. Furthermore, they can be mounted with screws or purchased with an adhesive backing.

## DBT SERIES



Double-grip, ratchet-style Hose [Clamps](#) are made from a tough black Nylon material that can withstand pressures up to 100 psi. There are sizes available to fit hose OD ranging from .22" to 2.97" (5.6mm to 75.4mm). The clamps can tolerate temperatures from -40° F to 340° F. They also have high chemical resistance including gasoline, oils, and most solvents.

SKU	DESCRIPTION
DBT-A	Double Ratchet Clamp .220 to .276 1/4 tube
DBT-AA	Double Ratchet Clamp .256 to .323 5/16 tube
DBT-B	Double Ratchet Clamp .319 to .382 3/8 tube
DBT-BB	Double Ratchet Clamp .362 to .425 13/32 tube
DBT-C	Double Ratchet Clamp .402 to .484 7/16 tube
DBT-CC	Double Ratchet Clamp .437 to .508 1/2 tube
DBT-D	Double Ratchet Clamp .480 to .583 1/2 tube
DBT-E	Double Ratchet Clamp .524 to .646 9/16 tube
DBT-F	Double Ratchet Clamp .594 to .717 5/8 tube
DBT-G	Double Ratchet Clamp .673 to .795 11/16 tube
DBT-H	Double Ratchet Clamp .732 to .870 3/4 tube
DBT-J	Double Ratchet Clamp .803 to .949 7/8 tube

<b>SKU</b>	<b>DESCRIPTION</b>
DBT-K	Double Ratchet Clamp .886 to 1.03 15/16 tube
DBT-L	Double Ratchet Clamp .976 to 1.13 1 inch tube
DBT-M	Double Ratchet Clamp 1.05 to 1.22 1-1/8 inch tube
DBT-N	Double Ratchet Clamp 1.15 to 1.319 1-1/4 inch tube
DBT-P	Double Ratchet Clamp 1.28 to 1.43 1-3/8 inch tube

## SCMS SERIES



SCMS Series is a miniature Hose Clamp that is 5/16" wide and made of 301 Stainless Steel. It has a 1/4" hex-slotted 410 Stainless Steel screw. Also it can be used for agricultural, industrial, and automotive applications. The diameter range is 5/8" to 1-3/4".

---



## PV SERIES- PINCH VALVE

PV Series is an Acetal pinch valve that controls the flow through by flexing tubing from zero to full flow. Since the fluid being delivered never comes in contact with the valve, there is no fear of contamination. In addition, this is a long-lasting reusable alternative to other fluid delivery valves. Furthermore, the body has an easy-to-read metered scale on the side for ease of use.

---



## STW SERIES

The STW Series spiral wrap is made of linear low-density Polyethylene. It wraps around tubing and allows for easy branching. The O.D. measurement is 1/2 inch and the I.D. is 3/8 inch. Available colors are natural and black.

---

SKU	Description
STW-2	For 1/16 inch to 1/4 inch Tubing
STW-3	For 1/8 inch to 1 inch Tubing
STW-4	For 3/16 inch to 2 inch Tubing
STW-6	For 3/16 inch to 3 inch Tubing
STW-8	For 3/8 inch to 4 inch Tubing
STW-10	For 5/8 inch to 4-1/2 inch Tubing



## TCP & TCPR SERIES

TCP Series Plastic Multi-position Clamps are made of Polyester for 1/4 inch, 3/16 inch, 5/32 inch, 1/2 inch, or 3/4 inch OD Tubing. These units can be sterilized using Gamma, ETO, or Autclave. Multi-position only available for 1/2 inch and 3/4 inch sizes only (shown).

---

SKU	Description
TCP-12	1/2 inch OD Tubing Clamp
TCP-14	1/4 inch OD Tubing Clamp
TCP-316	3/16 inch OD Tubing Clamp
TCP-34	3/4 inch OD Tubing Clamp
TCP-532	5/32 inch OD Tubing Clamp
TCPR-12	1/2 inch OD Tubing Multi-position Clamp
TCPR-34	3/4 inch OD Tubing Multi-position Clamp



# GAUGES

## GAUGES

Pneuline offers gauges with different PSIs, shop now!

## G1 SERIES GAUGE



G1 Series Pressure Gauge has an ABS case with a Brass movement and a dial size of 1". The Gauge is available in 30, 60, 100, and 160 psi. There is a 1/8" MNPT center back mount that can also accommodate a 10-32 male UNF fitting inside that 1/8" fitting. Also, the operating temperature for this gauge is 0° F to 160° F. The maximum supply is 50% over the gauge pressure range. Furthermore, his gauge is recommended for use with steam, air, oil, and water.

---

<b>SKU</b>	<b>DESCRIPTION</b>
G1-CBM-30	1 inch GAUGE CBM 0-30
G1-CBM-60	1 inch GAUGE CBM 0-60
G1-CBM-100	1 inch GAUGE CBM 0-100
G1-CBM-160	1 inch GAUGE CBM 0-160




# INDICATORS

## INDICATORS

Pneuline offers several pressure indicators, perfect for monitoring, testing, and calibration needs!

## CMPI SERIES - BRASS INDICATOR



CMPI Series is a single-pin 5/32" bore pressure indicator made of Brass. When the white pin is extended, the indicator is on. In addition, it is mountable on a maximum panel thickness of 3/16". The maximum input pressure is 150 psi and is recommended for air only. The mounting threads are 10-32 UNF and require a 1/4" NPT diameter mounting hole. Furthermore, the hex measures 5/16". The indicator is supplied with 2 panel mounting nuts. 40-micron filtration is recommended.

---

SKU	DESCRIPTION
CMPI-10-PM	10-32 Male Brass Panel Mount Pressure Indicator

## CLPI SERIES - BRASS INDICATOR



CLPI-Series is a multi-pin pressure indicator made of Brass. The indicator pins come in 4 colors: green, white, red, and yellow. This indicator is supplied with a #15/32-32 nut and lock washer for mounting. This is a plunger type indicator and when the pins are extended the indicator is on. The panel mount threads are 10-32 UNF. The input pressure is 150 psi with the minimum actuation pressure of 15 psi. The maximum panel thickness is 3/16". A 40-micron filter is recommended. The indicator is for use with air only.

---

SKU	DESCRIPTION
CLPI-2-G	10-32 Female Green Pressure Indicator
CLPI-10-RD	10-32 Female Red Pressure Indicator

## MPI SERIES - PRESSURE INDICATOR



Panel-mountable compact indicator light used to monitor the presence of air pressure. The light will be clear in the absence of pressure, it will be bright when activated by approximately 10 psi. The inlet port size is 1/8" NPT or 1/16" Barb. The body can be Electroless Nickel-Plated Brass or Aluminum alloy. The panel mount hole is 0.500" and the maximum panel thickness is 0.250". The panel mount threads are 15/32-32. Maximum operating pressure is 125 psi and the maximum temperature is 140° F. The display light is available in red or green and the panel mount bezel is available in black, white, or gray. It is supplied with one Electroless Nickel-Plated panel nut.

**SKU**

One Size Only

## NBI SERIES - PRESSURE INDICATOR



Panel mount pressure indicator equipped with a piston/diaphragm assembly that compresses a spring that rotates a colored indicator ball. When full actuation is reached, the ball rotates fully, changing the indicator color. The colors available are black with red, green and yellow, and red with green. The port threads are UNF 10-32 and male and female 1/8" NPT threads. The UNF port comes with an adapter for use with 1/16" ID tubing. The maximum pressure for the UNF port is 15 psi, for the female NPT it is 125 psi and for the male NPT port is 150 psi. The working temperature range is 35° F to 150° F. These indicators are made with either an Acetal or Polypropylene body.

**SKU**

**DESCRIPTION**

NBI-10-A	10-32 Male Acetal Pressure Indicator
NBI-2F-PP	1/8" FNPT Polypropylene Pressure Indicator

## PITC SERIES - PRESSURE INDICATOR



Single pin 5/32" bore pressure indicator made of Brass. When the white pin is extended, the indicator is on. This is a direct mount with male threads of 10-32 UNF and requires a 1/8" NPT mounting hole. The maximum input pressure is 150 psi and is recommended for air only. The minimum actuation pressure is approximately 12 psi. The hex is 1/4". 40-micron filtration is recommended.

---

SKU	DESCRIPTION
PITC-10	10-32 Male Brass Pressure Indicator



# MANIFOLDS

## MANIFOLDS

Explore Our Diverse Manifold Collection: Sizes and Materials Galore!



## DMAL SERIES - MANIFOLDS

DMAL Series has a rounded aluminum manifold that is ideal for air, water, and hydraulic fluid use. In addition, the temperature range of this manifold is -60° to 250°F. This manifold has an ideal maximum pressure of 300 psi.

SKU	DESCRIPTION
DMAL-1214	1/2" Female Inlet x Three 1/4" Female Outlet Aluminum Manifold
DMAL-1414	1/4" Female Inlet x Three 1/4" Female Outlet Aluminum Manifold
DMAL-3814	3/8" Female Inlet x Three 1/4" Female Outlet Aluminum Manifold

## HBM SERIES - MANIFOLDS



The HBM Series is a Brass flat hex Manifold that is perfect for confined spaces. There is a single mounting hole. All measurements are female NPT threads.

SKU	DESCRIPTION
HBM-1414	1/4" Inlet x Three 1/4" Outlets Brass Manifold
HBM-3814	3/8" Inlet x Three 1/4" Outlets Brass Manifold
HBM-3838	3/8" Inlet x Three 3/8" Outlets Brass Manifold

## PMM SERIES - MANIFOLDS



The PMM Series is a Black Anodized Aluminum Manifold that has a 1/4" or 3/8" female inlet port and 2 to 10 outlet ports of female NPT threads.

SKU	DESCRIPTION
PMM-4-10-2	1/4" FNPT by Ten 1/8" FNPT Anodized Aluminum Manifold
PMM-4-2-2	1/4" FNPT by Two 1/8" FNPT Anodized Aluminum Manifold
PMM-4-4-2	1/4" FNPT by Four 1/8" FNPT Anodized Aluminum Manifold
PMM-4-6-2	1/4" FNPT by Six 1/8" FNPT Anodized Aluminum Manifold
PMM-4-8-2	1/4" FNPT by Eight 1/8" FNPT Anodized Aluminum Manifold
PMM-6-10-2	3/8" FNPT by Ten 1/8" FNPT Anodized Aluminum Manifold
PMM-6-10-4	3/8" FNPT by Ten 1/4" FNPT Anodized Aluminum Manifold
PMM-6-2-4	3/8" FNPT by Two 1/4" FNPT Anodized Aluminum Manifold
PMM-6-4-2	3/8" FNPT by Four 1/8" FNPT Anodized Aluminum Manifold
PMM-6-4-4	3/8" FNPT by Four 1/4" FNPT Anodized Aluminum Manifold
PMM-6-6-2	3/8" FNPT by Six 1/8" FNPT Anodized Aluminum Manifold
PMM-6-6-4	3/8" FNPT by Six 1/4" FNPT Anodized Aluminum Manifold
PMM-6-8-2	3/8" FNPT by Eight 1/8" FNPT Anodized Aluminum Manifold

## CMM SERIES



The CMM Series is a black Anodized Aluminum Manifold that has a 1/8" female inlet port and 3 outlet ports of either 1/8" female NPT threads or 10-32 female UNF threads. All ports are on one side of the manifold.

SKU	DESCRIPTION
CMM-2F-3-1032	1/8" Inlet by Three 10-32 Outlet Ports Anodized Aluminum Manifold
CMM-2F-3-2F	1/8" Inlet by Three 1/8" Outlet Ports Anodized Aluminum Manifold
CMM-2F-4-1032	1/8" Inlet by Four 10-32 Outlet Ports Anodized Aluminum Manifold
CMM-2F-4-2F	1/8" Inlet by Four 1/8" Outlet Ports Anodized Aluminum Manifold
CMM-2F-5-1032	1/8" Inlet by Five 10-32 Outlet Ports Anodized Aluminum Manifold

## MAN SERIES



This manifold comes in a variety of metals and plastics and is available in 2, 4, 6, 8, and 10 outlet ports. Equal inlet and outlet on the ends of the manifold with a Step-down size port for the side outlets.

SKU	DESCRIPTION
MAN5-12-AL	Aluminum 1/2" Inlet by Five 3/8" Outlet Manifold
MAN6-38-P	Polypropylene 1/2" Inlet by Six 3/8" Outlet Manifold
MAN8-12-AL	Aluminum 1/2" Inlet by Eight 3/8" Outlet Manifold
MAN8-38-ACN	Natural Acetal 1/2" by Eight 3/8" Outlet Manifold
MAN8-38-AL	Aluminum 3/8" Inlet by Eight 1/2" Outlet Manifold
MAN8-38-P	Natural Polypropylene 1/2" Inlet by Eight 3/8" Outlet Manifold

## PUM SERIES




The PUM Series is a straight line Manifold with equal or reducing push-to-connect ports. It is also available with male NPT threads on the in-port.

SKU	DESCRIPTION
PUM-14	1/4 In/Out and 3 1/4 Ports Manifold
PUM-14532	1/4 In/Out and 3 5/32 Ports Manifold
PUM-18	1/8 In/Out and 3 1/8 Ports Manifold
PUM-3814	3/8 In/Out and 3 1/4 Ports Manifold
PUM-38516	3/8 In/Out and 3 5/16 Ports Manifold
PUM-516	5/16 In/Out and 3 5/16 Ports Manifold
PUM-51614	5/16 In/Out and 3 1/4 Ports Manifold
PUM-516316	5/16 In/Out and 3 3/16 Ports Manifold
PUM-516532	5/16 In/Out and 3 5/32 Ports Manifold
PUM-532	5/32 In/Out and 3 5/32 Ports Manifold
PUM-532185	5/32 In/Out and 3 1/8 Ports Manifold
PUM-2M532	1/8 MNPT In 5/32 Out and 3 5/32 Ports Manifold
PUM-2M532-316	1/8 MNPT In 5/32 Out and 3 3/16 Ports Manifold
PUM-4M316-516	1/4 MNPT In 5/16 Out and 3 5/16 Ports Manifold

SKU	DESCRIPTION
PUM-4M516-38	1/4 MNPT In 5/16 Out and 3 3/8 Ports Manifold
PUM-4M532-14	1/4 MNPT In 5/32 Out and 3 1/4 Ports Manifold
PUM-4M532-316	1/4 MNPT in 5/32 Out and 3 3/16 Ports Manifold
PUM-4M532-516	3/8 MNPT In 1/4 Out and 3 5/16 Ports Manifold
PUM-6M14-516	3/8 MNPT In 1/4 Out and 3 5/16 Ports Manifold
PUM-8M516-38	1/2 MNPT In 5/16 Out and 3 3/8 Ports Manifold
PUMR-14532	1/4 In/out with 3- 5/32 Ports Reducer Manifold

## WAM SERIES



WAM Series is a ready-to-use Nylon Manifold with 4, 8, 16, 4 Center 4 Plug, or 8 Center 8 Plug ports. Also, the port sizes available are 1/4 inch, 3/8 inch, and 1/2 inch with supply sizes of 1 inch or 1-1/2 inch. Available in red or blue. For use with Brass, Nylon, or Steel fittings. Mount brackets and Plugs are available separately.

SKU	Description
WAM-4-14-1-B	4 Ports, 1/4 inch FNPT Port and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-4-14-1-R	4 Ports, 1/4 inch FNPT Port and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-4-38-1-B	4 Ports, 3/8 inch FNPT Port and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-4-38-1-R	4 Ports, 3/8 inch FNPT Port and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-4-38-112-B	4 Ports, 3/8 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-4-38-112-R	4 Ports, 3/8 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-4-12-112-B	4 Ports, 1/2 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-4-12-112-R	4 Ports, 1/2 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8-14-1-B	8 Ports, 1/4 inch FNPT Port and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8-14-1-R	8 Ports, 1/4 inch FNPT Port and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8-38-1-B	8 Ports, 3/8 inch FNPT Port and 1 inch FNPT Supply In/Out Blue Nylon Manifold

SKU	Description
WAM-8-38-1-R	8 Ports, 3/8 inch FNPT Port and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8-38-112-B	8 Ports, 3/8 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8-38-112-R	8 Ports, 3/8 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8-12-112-B	8 Ports, 1/2 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8-12-112-R	8 Ports, 1/2 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16-14-1-B	16 Ports, 1/4 inch FNPT Port and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16-14-1-R	16 Ports, 1/4 inch FNPT Port and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16-38-1-B	16 Ports, 3/8 inch FNPT Port and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16-38-1-R	16 Ports, 3/8 inch FNPT Port and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16-38-112-B	16 Ports, 3/8 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16-38-112-R	16 Ports, 3/8 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16-12-112-B	16 Ports, 1/2 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16-12-112-R	16 Ports, 1/2 inch FNPT Port and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8C-14-1-B	8 Ports, 1/4 inch FNPT split center and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8C-14-1-R	8 Ports, 1/4 inch FNPT split center and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8C-38-1-B	8 Ports, 3/8 inch split center and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8C-38-1-R	8 Ports, 3/8 inch split center and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8C-38-112-B	8 Ports, 3/8 inch split center and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8C-38-112-R	8 Ports, 3/8 inch split center and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-8C-12-112-B	8 Ports, 1/2 inch FNPT split center and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-8C-12-112-R	8 Ports, 1/2 inch FNPT split center and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16C-14-1-B	16 Ports, 1/4 inch FNPT split center and 1 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16C-14-1-R	16 Ports, 1/4 inch FNPT split center and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16C-38-1-B	16 Ports, 3/8 inch FNPT split center and 1 inch FNPT Supply In/Out Blue Nylon Manifold

<b>SKU</b>	<b>Description</b>
WAM-16C-38-1-R	16 Ports, 3/8 inch FNPT split center and 1 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16C-38-112-B	16 Ports, 3/8 inch FNPT split center and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16C-38-112-R	16 Ports, 3/8 inch FNPT split center and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold
WAM-16C-12-112-B	16 Ports, 1/2 inch FNPT split center and 1-1/2 inch FNPT Supply In/Out Blue Nylon Manifold
WAM-16C-12-112-R	16 Ports, 1/2 inch FNPT split center and 1-1/2 inch FNPT Supply In/Out Red Nylon Manifold




# TUBING

## TUBING

From flexibility to chemical resistance, Pneuline Supply offers tubing solutions engineered for reliability and performance. Discover your perfect fit—request a quote today!


## SM SERIES



The SM Series is a 50 +/- 5, Durometer medical-grade Silicone tubing that has been peroxide-cured. It is resilient, stretchable, and resistant to compression. USP class VI. Also, it is UV, ozone, gas, and moisture resistant. This tubing can be autoclavable up to 250F. Furthermore, its temperature range is -100° F to 500° F, meets FDA standards, and is NSF 51 listed.

SKU	DESCRIPTION
SM-012025	.012 by .025 50 Durometer Medical Grade Silicone Tubing
SM-025047	.025 by .047 50 Durometer Medical Grade Silicone Tubing
SM-030065	.030 by .0656 50 Durometer Medical Grade Silicone Tubing
SM-03156	.030 by .156 50 Durometer Medical Grade Silicone Tubing
SM-040085	.040 by .085 50 Durometer Medical Grade Silicone Tubing
SM-058077	.058 by .077 50 Durometer Medical Grade Silicone Tubing
SM-062095	.062 by .095 50 Durometer Medical Grade Silicone Tubing
SM-1618	1/16" .062 by 1/8" 50 Durometer Medical Grade Silicone Tubing
SM-16316	1/16" by 3/16" 50 Durometer Medical Grade Silicone Tubing
SM-078125	.078 by .125 50 Durometer Medical Grade Silicone Tubing
SM-104192	.104 by .192 50 Durometer Medical Grade Silicone Tubing
SM-132183	.132 by .183 50 Durometer Medical Grade Silicone Tubing
SM-132532	1/32" by 5/32" 50 Durometer Medical Grade Silicone Tubing
SM-332532	3/32" by 5/32" 50 Durometer Medical Grade Silicone Tubing
SM-332732	3/32" by 7/32" 50 Durometer Medical Grade Silicone
SM-1814	1/8" by 1/4" 50 Durometer Medical Grade Silicone Tubing
SM-18516	1/8" by 5/16" 50 Durometer Medical Grade Silicone Tubing
SM-316516	3/16" by 5/16" 50 Durometer Medical Grade Silicone Tubing
SM-31638	3/16" by 3/8" 50 Durometer Medical Grade Silicone Tubing
SM-1438	1/4" by 3/8" 50 Durometer Medical Grade Silicone Tubing
SM-14716	1/4" by 7/16" 50 Durometer Medical Grade Silicone Tubing
SM-1412	1/4" by 1/2" 50 Durometer Medical Grade Silicone Tubing
SM-516716	5/16" by 7/16" 50 Durometer Medical Grade Silicone Tubing
SM-51612	5/16" by 1/2" 50 Durometer Medical Grade Silicone Tubing
SM-3812	3/8" by 1/2" 50 Durometer Medical Grade Silicone Tubing
SM-3858	3/8" by 5/8" 50 Durometer Medical Grade Silicone Tubing
SM-1258	1/2" by 5/8" 50 Durometer Medical Grade Silicone Tubing
<b>SM-1234</b>	<b>1/2" by 3/4" 50 Durometer Medical Grade Silicone Tubing</b>

## SI SERIES



The SI Series is an unreinforced, translucent Silicone tubing with a Shore hardness of 50. It has a maximum operating temperature of 500° F and 350° F for NSF. In addition, this peroxide-cured Silicon contains no sulfur or other acid-producing chemicals so there should be no staining, corroding, or deterioration of materials it contacts. It is very resistant to ozone and UV. It is autoclavable up to 250° F in a normal cycle. Furthermore, colors available for industrial applications are black (BK), green (GN), violet (V), red (RD), and yellow (YW).

SKU	DESCRIPTION
SI-1412	Silicone Industrial Grade 1/4 by 1/2
SI-1438	Silicone Industrial Grade 1/4 by 3/8
SI-14516	Silicone Industrial Grade 1/4 by 5/16
SI-14716	Silicone Industrial Grade 1/4 by 7/16
SI-1618	Silicone Industrial Grade 1/16 by 1/8
SI-16316	Silicone Industrial Grade 1/16 by 3/16
SI-1814	Silicone Industrial Grade 1/8 by 1/4
SI-18316	Silicone Industrial Grade 1/8 by 3/16
SI-1838	Silicone Industrial Grade 1/8 by 3/8
SI-18516	Silicone Industrial Grade 1/8 by 5/16
SI-31614	Silicone Industrial Grade 3/16 by 1/4
SI-31638	Silicone Industrial Grade 3/16 by 3/8
SI-316516	Silicone Industrial Grade 3/16 by 5/16
SI-316716	Silicone Industrial Grade 3/16 by 7/16
SI-332532	Silicone Industrial Grade 3/32 by 5/32
SI-332732	Silicone Industrial Grade 3/32 by 7/32
SI-3812	Silicone Industrial Grade 3/8 by 1/2
SI-38916	Silicone Industrial Grade 3/8 by 9/16
SI-51612	Silicone Industrial Grade 5/16 by 1/2
SI-516716	Silicone Industrial Grade 5/16 by 7/16
SI-5321132	Silicone Industrial Grade 5/32 by 11/32
SI-532932	Silicone Industrial Grade 5/32 by 9/32

## KT SERIES



The KT Series is a flexible PVDF tubing suitable for use with flare and compression fittings. This tubing is resistant to many commonly used industrial fluids and gasses, including ozone, and does not support the growth of fungi and bacteria. In addition, PVDF material is UV-resistant and FDA-compliant. It can be used with water disinfection involving ozone, aquariums, spas, and pools and is also recommended for agriculture, food, beverage, and water purification applications. Furthermore, we offer several standard sizes as well as custom sizes upon request.


### Applications

- Metal Preparation
- Food & Beverage
- Petrochemical Processing
- High Purity Semiconductor
- Water Purification
- Chemical Process
- Nuclear Waste
- Ultra-Pure Water Process Systems
- Pulp & Paper
- Aquarium
- Pool & Spa

---

SKU	DESCRIPTION
KT-11618	1/16 ID 1/8 OD PVDF Tubing
KT-1438	1/4 ID 3/8 OD PVDF Tubing
KT-1714	.170 ID 1/4 OD PVDF Tubing
KT-1814	1/8 ID 1/4 OD PVDF Tubing
KT-31614	3/16 ID 1/4 OD PVDF Tubing
KT-316516	3/16 ID 5/16 OD PVDF Tubing
KT-3812	3/8 ID 1/2 OD PVDF Tubing
KT-51638	5/16 ID 3/8 OD PVDF Tubing
KT-516716	5/16 ID 7/16 OD PVDF Tubing
KT-18316	1/8 ID 3/16 OD PVDF Tubing
KT-17014	.170 ID 1/4 OD PVDF Tubing
KT-71612	7/16 ID 1/2 OD PVDF Tubing
KT-1258	1/2 ID 5/8 OD PVDF Tubing
KT-5834	5/8 ID 3/4 OD PVDF Tubing
KT-3478	3/4 ID 7/8 OD PVDF Tubing
KT-781	7/8 ID 1 inch OD PVDF Tubing
KT-53214	5/32 ID 1/4 OD PVDF Tubing
KT-46M	2 mm ID 4 mm OD PVDF Tubing
KT-68M	4 mm ID 6 mm OD PVDF Tubing

SKU	DESCRIPTION
KT-68M	6 mm ID 8 mm OD PVDF Tubing
KT-810M	8 mm ID 10 mm OD PVDF Tubing

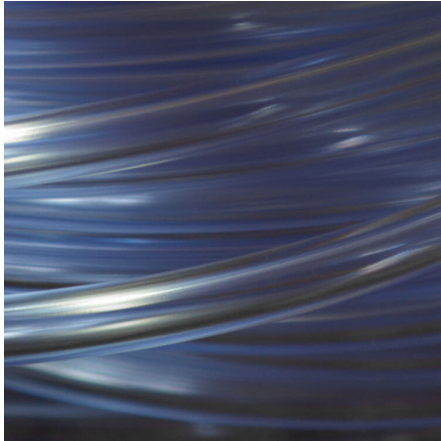

## V80 PVC TUBING

The V80 Series is a clear 80 Durometer PVC tubing that can withstand autoclaving and gamma sterilization. It meets FDA standards. The temperature range for this tubing is -45° F to 165° F. The working pressure at 73° F is 43 psi.

---

SKU	Description
V80-1438	1/4 inch ID by 3/8 inch OD 80 Durometer FDA Vinyl Tubing
V80-14516	1/4 inch ID by 5/16 inch OD 80 Durometer FDA Vinyl Tubing
V80-1814	1/8 inch ID by 1/4 inch OD 80 Durometer FDA Vinyl Tubing
V80-316516	3/16 inch ID by 5/16 inch OD 80 Durometer FDA Vinyl Tubing
V80-3858-FDA	3/8 inch ID by 5/8 inch OD 80 Durometer FDA Vinyl Tubing