




SWIVEL FITTINGS

SWIVEL FITTINGS

These Brass Swivel Fittings can be used to connect valves, pipes, and other items. These fittings are often used for gas, air, or fluid lines.

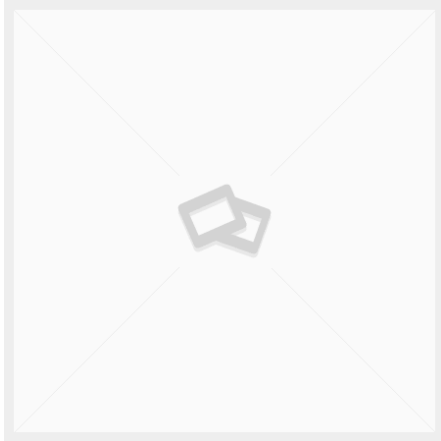

ESMM SERIES

Brass 90° Elbow Swivel connector with male-to-male NPT threads. The swivel allows full flow at any angle.


SKU	DESCRIPTION
ESMM-4	1/4 MNPT by 1/4 MNPT Brass Elbow Swivel



BHFS SERIES

The BHFS Series is a brass long-connect female Swivel adapter with NPT threads to hose barbs. The maximum working pressure is 150 psi at -40° F to 160° F. These barbs are intended to be used with hose clamps.

SKU	DESCRIPTION
BHFS-4F4B	1/4 FNPT by 1/4 Barb Brass Swivel
BHFS-4F6B	1/4 FNPT by 3/8 Barb Brass Swivel
BHFS-6F6B	3/8 FNPT by 3/8 Barb Brass Swivel
BHFS-6F8B	3/8 FNPT by 1/2 Barb Brass Swivel
BHFS-8F8B	1/2 FNPT by 1/2 Barb Brass Swivel

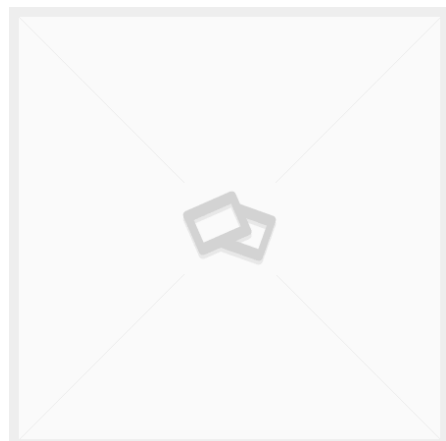

BHES SERIES

Brass male 90° Swivel Elbow with NPT threads to hose bars. These bars are intended to be used with hose clamps.

SKU	DESCRIPTION
BHES-2M4B	1/8 MNPT by 1/4 Barb 90° Swivel Elbow
BHES-2M6B	1/8 MNPT by 3/8 Barb 90° Swivel Elbow
BHES-4M4B	1/4 MNPT by 1/4 Barb 90° Swivel Elbow
BHES-4M6B	1/4 MNPT by 3/8 Barb 90° Swivel Elbow
BHES-4M8B	1/4 MNPT by 1/2 Barb 90° Swivel Elbow
BHES-6M6B	3/8 MNPT by 3/8 Barb 90° Swivel Elbow


SMWS SERIES

The SMWS Series is a Standard Brass Swivel. It has male NPT threads to a hose barb attachment. Also the swivel has a full 360° rotation. The temperature range for this swivel is -40° F to 160° F at 150 psi.



SKU	DESCRIPTION
SMWS-4M4B	1/4 MNPT by 1/4 Barb
SMWS-4M6MH	1/4 MNPT by 3/8 Barb High Flow
SMWS-4M6B	1/4 MNPT by 3/8 Barb
SMWS-8M8B	1/2 MNPT by 1/2 Barb

SWFA SERIES

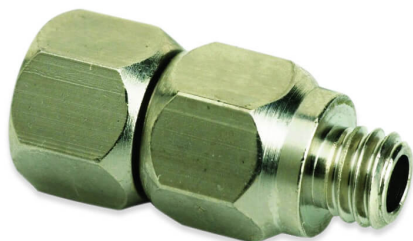

The SWFA Series is a Brass Swivel connector with male and female 10-32 UNF threads. Also available with 1/8" female NPT to 10-32 male UNF threads or 10-32 female UNF to 1/8 male NPT.

SKU	DESCRIPTION
SWFA-2F10M	1/8 FNPT by 10-32 Female UNF Swivel
SWFA-10F10M	10-32 Male by 10-32 Female UNF Swivel
SWFA-10F2M	10-32 Female UNF by 1/8 FNPT Swivel

KNK SERIES- SWIVEL CONNECTOR



Nickel-plated brass Orbital Swivel connector with male-to-male, male-to-female, and female-to-female NPT threads with a full range of motion. The fittings swivel at the pipe threads and between the segments.

SKU	DESCRIPTION
KNK-4M	1/4 MNPT by 1/4 MNPT Orbital Swivel
KNK-4MF	1/4 MNPT by 1/4 FNPT Orbital Swivel
KNK-4F	1/4 FNPT by 1/4 FNPT Orbital Swivel


BSR SERIES



The BSR Series is a Brass Swivel connector with female to male NPT threads or male NPT threads to hose barb. In addition, the swivel allows full flow at any angle and the range of motion is 20° to 25°.

SKU	DESCRIPTION
BSR-4M4F	1/4 MNPT by 1/4 FNPT Brass Swivel
BSR-4M6F	1/4 MNPT by 3/8 FNPT Brass Swivel
BSR-6M6F	3/8 MNPT by 3/8 FNPT Brass Swivel
BSR-4M4B	1/4 MNPT by 1/4 Barb Brass Swivel
BSR-4M5B	1/4 MNPT by 5/16 Barb Brass Swivel
BSR-4M6B	1/4 MNPT by 3/8 Barb Brass Swivel
BSR-6M6B	1/4 MNPT by 3/8 Barb Brass Swivel


ESMF SERIES

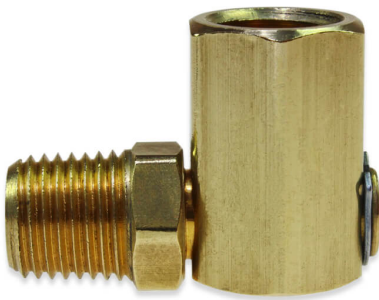

The ESMF Series is a Brass Swivel 90° Elbow connector with female to male NPT threads. Also, the swivel allows for a full 360° rotation.

SKU	DESCRIPTION
ESMF-4	1/4 MNPT by 1/4 FNPT 90° Swivel Elbow

SNPW SERIES



The SNPW Series is an In-line Brass Swivel connector with female to male NPT threads. The swivel allows for a full 360° rotation. Also it has Buna-N or FKM O-rings with a Polyphenylene thrust bearing.

SKU	DESCRIPTION
SNPW-4F4M	1/4 FNPT by 1/4 MNPT Brass Swivel
SNPW-6F4M	3/8 FNPT by 1/4 MNPT Brass Swivel
SNPW-6F6M	3/8 FNPT by 3/8 MNPT Brass Swivel

BHAS SERIES



The BHAS Series is a long Brass Swivel with male NPT threads to hose barbs. The maximum working pressure is 150 psi at -40° F to 160° F.

SKU	DESCRIPTION
BHAS-2M3B	1/8 MNPT by 3/16 Barb Long Swivel
BHAS-4M4B	1/4 MNPT by 1/4 Barb Long Swivel
BHAS-4M6B	1/4 MNPT by 3/8 Barb Long Swivel
BHAS-6M8B	3/8 MNPT by 1/2 Barb Long Swivel
BHAS-12M12B	3/4 MNPT by 3/4 Barb Long Swivel


SSWS SERIES



The SSWS Series is a Brass Swivel Adapter. It is available with male NPT threads to female NPT threads or a barb connection. The working pressure for both the threaded and barbed swivels is 300 psi. Both swivels have a bronze thrust bearing and EPDM or FKM seals. This swivel provides a full 360° rotation. The barbs are intended to be used with a hose clamp.

SKU	DESCRIPTION
SSWS-4M4B	1/4 MNPT by 1/4 Barb Brass Swivel
SSWS-6M6B	3/8 MNPT by 3/8 Barb Brass Swivel
SSWS-8F8M	1/8 FNPT by 1/8 MNPT Brass Swivel
SSWS-4F4M	1/4 FNPT by 1/4 MNPT Brass Swivel
SSWS-6F6M	3/8 FNPT by 3/8 MNPT Brass Swivel

NPRT SERIES

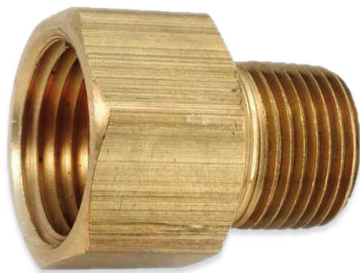

The NPRT Series Brass Rotary Fittings can be used in constant motion or adjustable. Listed stationary or rotating.

SKU	Description
NPRT-2M2M	1/8 MNPT to 1/8 MNPT Brass Rotary Adapter
NPRT-2M4M	1/8 MNPT to 1/4 MNPT Brass Rotary Adapter
NPRT-4M4M	1/4 MNPT to 1/4 MNPT Brass Rotary Adapter
NPRT-6M6M	3/8 MNPT to 3/8 MNPT Brass Rotary Adapter
NPRT-6M8M	3/8 MNPT to 1/2 MNPT Brass Rotary Adapter
NPRT-2M2F	1/8 MNPT to 1/8 FNPT Brass Rotary Adapter
NPRT-2M4F	1/8 MNPT to 1/4 FNPT Brass Rotary Adapter
NPRT-4M4F	1/4 MNPT to 1/4 FNPT Brass Rotary Adapter
NPRT-6M6F	3/8 MNPT to 3/8 FNPT Brass Rotary Adapter
NPRT-6M8F	3/8 MNPT to 1/2 FNPT Brass Rotary Adapter
NPRT-8M8F	1/2 MNPT to 1/2 FNPT Brass Rotary Adapter



SFWS SERIES

The SFWS Series is a female Brass multi-barb Swivel adapter with a gasket. It has female NPT threads to a hose barb attachment. The swivel has a full 360° rotation. The temperature range for this swivel is -40° F to 160° F at 150 psi.

*****This swivel is not recommended for water because of the fiber gasket. Air only.*****

SKU	Description
SFWS-2F4B	1/8 FNPT by 1/4 Barb Brass Swivel
SFWS-4F4B	1/4 FNPT by 1/4 Barb Brass Swivel
SFWS-4F5B	1/4 FNPT by 5/16 Barb Brass Swivel
SFWS-4F6B	1/4 FNPT by 3/8 Barb Brass Swivel
SFWS-6F4B	3/8 FNPT by 1/4 Barb Brass Swivel
SFWS-6F6B	3/8 FNPT by 3/8 Barb Brass Swivel
SFWS-6F8B	3/8 FNPT by 1/2 Barb Brass Swivel
SFWS-8F6B	1/2 FNPT by 3/8 Barb Brass Swivel
SFWS-8F8B	1/2 FNPT by 1/2 Barb Brass Swivel
SFWS-12F8B	3/4 FNPT by 1/2 Barb Brass Swivel
SFWS-12F10B	3/4 FNPT by 5/8 Barb Brass Swivel