



PLASTIC QUICK COUPLERS

PLASTIC QUICK COUPLERS

Are you looking for a Plastic Quick Coupler with a fast connection? Shop our collection of Acetal or Polypropylene Couplers - Request a Quote Today!



ACETAL QUICK CONNECTS

ACETAL QUICK CONNECTS




10AC ACETAL QUICK CONNECT

10AC ACETAL QUICK CONNECT

Check out our 10AC Acetal Quick Connects, expertly crafted for exceptional performance and reliability in your applications. These couplers have a flow rate of 1/16 inch.

10AC-PB3 SERIES

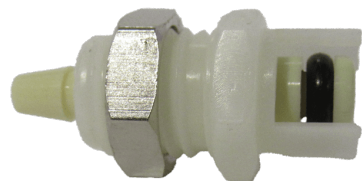

1/16 Flow Panel Mount Insert, 7/16-24 UNF thread for 1/2 ID thru hole.
Available in 1/16 and 1/8 Barb Size molded from Natural or Black Acetal.

NON-VALVED	TUBE SIZE	LENGTH	WIDTH
10AC-PB2-01	1/16	.75	.50
10AC-PB2-01BLK	1/16	.75	.50
10AC-PB2-02	1/8	.75	.50
10AC-PB2-02BLK	1/8	.75	.50

10AC2 IN LINE SERIES



1/16 Flow, complete inline coupler with 1/16 or 1/8 Barb Sizes or can be 1/16 to 1/8 sizes upon request. Natural or Black Acetal in valved or non-valved combination.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
10AC2-01	10ACV2-01	1/16" ID	1.6 MM ID	1.46"	.48"	.48"
10AC2-01BLK	10ACV2-01BLK	1/16" ID	1.6 MM ID	1.46"	.48"	.48"
10AC2-02	10ACV2-02	1/8" ID	3.2 MM ID	1.61"	.48"	.48"
10AC2-02BLK	10ACV2-02BLK	1/8" ID	3.2 MM ID	1.61"	.48"	.48"



10AC PB2 SERIES NO SLEEVE

10AC PB2 Series is an Inline Hose Barb Plug, with a 1/16 Flow. The Barb sizes are 1/16 and 1/18 in Natural or Black Acetal. This product is made for use with vacuum lines. For use with the 10AC-S2 series Sockets.

NON-VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
10AC-PB2-01NS	1/16" ID Acetal	1.6" MM ID	.75"	.32"	.32"
10AC-PB2-01NSBLK	1/16" ID Black Acetal	1.6" MM ID	.75"	.32"	.32"
10AC-PB2-02NS	1/8" ID Acetal	3.2" MM ID	.90"	.32"	.32"
10AC-PB2-02NSBLK	1/8" ID Black Acetal	3.2" MM ID	.90"	.32"	.32"



10AC S2 NO SLEEVE SERIES

1/16 Flow Acetal Socket for use with vacuum lines, no collar for coupling. FDA/NSF Buna O-ring

Sizes 1/16 and 1/18 Barb in Natural or Black Acetal both valved and non-valved. For use with 10AC-PB2 series.

10AC-S2-01NS	1/16 Tube ID Socket Vacuum Connector
10AC-S2-01NSBLK	1/16 Tube ID Socket Black Vacuum Connector
10AC-S2-02NS	1/8 Tube ID Socket Vacuum Connector
10AC-S2-02NSBLK	1/8 Tube ID Black Socket Vacuum Connector
10ACV-SB2-01NS	1/16 tube Valved Socket Vacuum Connector
10ACV-SB2-01NS	1/8 tube Valved Socket Vacuum Connector
10ACV-SB2-01NS	1/16 Tube Valved Socket Vacuum Connector Black Acetal
10ACV-SB2-01NS	1/8 Tube Valved Socket Vacuum Connector Black

10AC PB2 ACETAL PLUG BARB



1/16 Flow Acetal quick coupler insert with Twist Lock Barrel design.
Available 1/16 or 1/8 Barb

FDA/NSF Buna O-ring

NON-VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
10AC-PB2-01	1/16" ID	1.6 MM ID	.75"	.48"	.48"
10AC-PB2-01BLK	1/16" ID	1.6 MM ID	.75"	.48"	.48"
10AC-PB2-02	1/8" ID	3.2 MM ID	.90"	.48"	.48"
10AC-PB2-02BLK	1/8" ID	3.2 MM ID	.90"	.48"	.48"

10AC S2 SERIES



Acetal Inline Hose Barb Socket with Twist Lock Barrel

1/16 and 1/8 Barb

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
10AC-S2-01	10ACV-SB2-01	1/16" ID	1.6 MM ID	.90	.48	.48
10AC-S2-01BLK	10ACV-SB2-01BLK	1/16" ID	1.6 MM ID	.90	.48	.48
10AC-S2-02	10ACV-SB2-02	1/8" ID	3.2 MM ID	.90	.48	.48
10AC-S2-02BLK	10ACV-SB2-02BLK	1/8" ID	3.2 MM ID	.90	.48	.48



10AC S3 PANEL MOUNT SERIES

1/16 Flow Panel Mounts Socket are available with Valved or Non-Valved connections. 1/16 and 1/8 Barb Size provided in Natural or Black Acetal. For use with 10AC PB2 series Plugs.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
10AC-S3-01	10ACV-SB3-01	1/16" ID	1.6 MM ID	.90"	.50"	.58"
10AC-S3-01BLK	10ACV-SB3-01BLK	1/16" ID	1.6 MM ID	.90"	.50"	.58"
10AC-S3-02	10ACV-SB3-02	1/8" ID	3.2 MM ID	.90"	.50"	.58"
10AC-S3-02BLK	10ACV-SB3-02BLK	1/8" ID	3.2 MM ID	.90"	.50"	.58"



20AC ACETAL QUICK CONNECT

20AC ACETAL QUICK CONNECT

Discover the precision and reliability of our 20AC Acetal Quick Connects, expertly crafted to meet your application needs. Enhance your workflow with these top-quality connectors for seamless integration and unmatched performance. These couplers have a flow rate of 1/8 inch.



20AC S9 SERIES

20 Series, 1/8 Flow, Socket with Compression Fitting for of 5/32, (.10 ID) and 1/4 OD (.170 ID) Polyethylene or polyurethane tubing.

Available with and w/o Shut off.

Stainless Steel Latch and spring. Nickel Plated Brass compression nut.

NON-VALVED	VALVED	TUBE ID/OD	LENGTH	WIDTH
20AC-S9-025	20ACV-S9-025	3/64 ID/ 5/32 OD	1.65	.62
20AC-S9-04	20ACV-S9-04	.170 ID/ .250 OD	1.75	.62



20AC S8 SERIES

20 Series Socket Panel Mount is designed with a compression fitting suitable for 5/32 inch and 1/4-inch OD Polyurethane Tubing. This product is available with or without a shutoff feature. The compression nut is crafted from nickel-plated brass. The panel mount includes a stainless-steel latch and spring, providing robust performance The 5/8 hex nut for the panel nut is a nickel-plated brass 1/2-24 UNS thread. Thru hole for the panel is .50 inches. Available with a gasket seal, Buna or EPDM, add GS to the part number.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
20AC-S8-025	20ACV-SB8-025	5/32" OD, .10" ID	4.0 MM OD, 2.5 MM ID	1.70"	.62"	.80"
20AC-S8-04	20ACV-SB8-04	1/4" OD, .17" ID	6.4 MM OD, 4.3 MM ID	1.72"	.62"	.80"
20AC-S8-025GS	20ACV-SB8-025GS	5/32" OD, .10" ID	4.0 MM OD, 2.5 MM ID	1.70"	.62"	.80"
20AC-S8-04GS	20ACV-SB8-04GS	1/4" OD, .17" ID	6.4 MM OD, 4.3 MM ID	1.72"	.62"	.80"



20AC PB1 NPT SERIES

1/8 Flow, Male insert, with 1/8, or 1/4 Pipe Threads. BSPT optional.

Available with or without shutoff. Buna o-ring.

NON-VALVED	VALVED	THREAD	LENGTH	WIDTH
20AC-PB1-02	20ACV-PB1-02	1/8 NPT	1.03NV/1.36V	.50
20AC-PB1-02BSPT	20ACV-PB1-02BSPT	1/8 BSPT	1.03NV/1.36V	.50
20AC-PB1-04	20ACV-PB1-04	1/4 NPT	1.13NV/1.39V	.50
20AC-PB1-04BSPT	20ACV-PB1-04BSPT	1/4 BSPT	1.13NV/1.39V	.50



20AC PB8 SERIES

1/8 flow 20 series male insert with panel mount and compression fitting for 1/4 OD, .170 ID tubing. Available with and w/o shutoff.

Nickel plated Brass Panel nut. 5/8 Hex with a 1/2-24 UNF thread.



20AC PB3 SERIES

1/8 flow male insert, panel mount coupler available in 1/16, 1/8, 3/16 and 1/4 Barbs. product is made with and w/o shutoff.

Nickel plated Brass Panel nut, 5/8 hex with a 1/2-24 UNS threads. Panel mount thru hole requires .50 inches.

Non-valved	Valved	Description
20AC-PB3-01	20ACV-PB3-01	1/16 Hose Barb
20AC-PB3-02	20ACV-PB3-02	1/8 Hose Barb
20AC-PB3-03	20ACV-PB3-03	3/16 Hose Barb
20AC-PB3-04	20ACV-PB3-04	1/4 Hose Barb



20AC PB9 INSERT COMPRESSION FITTING

1/8 Flow Male insert, straight with Compression Fitting. Available 5/32 and 1/4 OD tubing size.

Available with and w/o shutoff.

Nickel-plated Brass nut.

NON-VALVED	VALVED	TUBE ID/ OD	LENGTH	WIDTH
20AC-PB9-025	20ACV-PB9-025	5/64 ID/ 3/32 OD	1.15NV/ 1.65V	.62
20AC-PB9-04	20ACV-PB9-04	.170 ID/ .250 OD	1.15NV/ 1.65V	.62



20AC S3 SERIES

1/8 Flow Socket Panel Mount Barbed

1/16, 1/8, 3/16, 1/4 ID Tube sizes

Valve and Non-valved available

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
20AC-S3-01	20ACV-SB3-01	1/16" ID	1.6 MM ID	1.40"	.62"	.80"
20AC-S3-02	20ACV-SB3-02	1/8" ID	3.2 MM ID	1.65"	.62"	.80"
20AC-S3-03	20ACV-SB3-03	3/16" ID	4.8 MM ID	1.80"	.62"	.80"
20AC-S3-04	20ACV-SB3-04	1/4" ID	6.4 MM ID	1.80"	.62"	.80"
20AC-S3-01GS	20ACV-SB3-01GS	1/16" ID	1.6 MM ID	1.40"	.62"	.80"
20AC-S3-02GS	20ACV-SB3-02GS	1/8" ID	3.2 MM ID	1.65"	.62"	.80"
20AC-S3-03GS	20ACV-SB3-03GS	3/16" ID	4.8 MM ID	1.80"	.62"	.80"
20AC-S3-04GS	20ACV-SB3-04GS	1/4" ID	6.4 MM ID	1.80"	.62"	.80"



20AC S2 SERIES

1/8 Flow, Hose Barb Socket, Acetal with Stainless Steel Release Latch and Spring.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
20AC-S2-01	20ACV-SB2-01	1/16"	1.6 MM ID	1.42"	.62"	.80"
20AC-S2-02	20ACV-SB2-02	1/8"	3.2 MM ID	1.65"	.62"	.80"
20AC-S2-03	20ACV-SB2-03	3/16"	4.8 MM ID	1.80"	.62"	.80"
20AC-S2-04	20ACV-SB2-04	1/4"	6.4 MM ID	1.80"	.62"	.80"

20AC PB4 SERIES



The 20AC PB4 Series is a Male Quick Coupler with a 1/8 Flow and a 90° Elbow. This product is made from Acetal with a Buna O-ring. Also, the available barb sizes are 1/8 and 1/4 with or without shutoff.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	HEIGHT
20AC-PB4-02	20ACV-PB4-02	1/8" ID	3.2 MM ID	.86"/1.19"	.50"	.95"
20AC-PB4-04	20ACV-PB4-04	1/4" ID	6.4 MM ID	.98"/1.19"	.50"	1.10"



20AC S1 SERIES

Quick Coupler Threaded NPT or BSPT. 1/8 Flow Female Socket with Stainless latch and spring.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	LENGTH
20AC-S1-02	20ACV-SB1-02	1/8" NPT	1.00"	.62"	.80"
20AC-S1-02BSPT	20ACV-SB1-02BSPT	1/8" BSPT	1.00"	.62"	.80"
20AC-S1-04	20ACV-SB1-04	1/4" NPT	1.00"	.62"	.80"
20AC-S1-04BSPT	20ACV-SB1-04BSPT	1/4" BSPT	1.00"	.62"	.80"



20AC PB2 SERIES

Acetal Quick Coupler. 1/8 Flow inline Barbed Male Plug in Valved or Non-Valved. The picture shown is a valved unit.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	HEIGHT
20AC-PB2-01	20ACV-PB2-01	1/16" ID	1.6 MM ID	.80"/1.48"	.55"	.55"
20AC-PB2-02	20ACV-PB2-02	1/8" ID	3.2 MM ID	.97"/1.65"	.55"	.55"
20AC-PB2-03	20ACV-PB2-03	3/16" ID	4.8 MM ID	1.12"/.80"	.55"	.55"
20AC-PB2-04	20ACV-PB2-04	1/4" ID	6.4 MM ID	1.12"/.80"	.55"	.55"



20AC PB10 SERIES

20AC 1/8 Flow. Acetal Male Plug Elbows quick couplers. Compression sizes of 5/32 OD by .10 ID and 1/4 OD by .170 ID Poly tubing.

Nickel-plated brass nut.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	HEIGHT
20AC-PB10-025	20ACV-PB10-025	5/32" OD, .10" ID	4.0 MM OD, 2.5 MM ID	1.09"/1.20"	.50"	.99"
20AC-PB10-04	20ACV-PB10-04	1/4 OD", .17" ID	6.4 MM OD, 4.3 MM ID	1.09"/1.20"	.50"	1.02"



20AC S4 SERIES

1/8 flow Socket with 1/8 or 1/4 hose barbs

Natural Acetal (POM)

Available with or w/o shutoff.

NON VALVED	VAVLED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
20AC-S4-02	20ACV-SB4-02	1/8" ID	3.2 MM ID	1.3"	.63"	1.3"
20AC-S4-04	20ACV-SB4-04	1/4" ID	6.4 MM ID	1.3"	.63"	1.3"



40AC ACETAL QUICK CONNECT

40AC ACETAL QUICK CONNECT

Explore the exceptional performance of our 40AC Acetal Quick Connects, meticulously designed to meet all your application needs. Elevate your workflow with these reliable, durable, and easy-to-use connectors. These couplers have a flow rate of 1/4 inch.

40AC PB4 SERIES



The Quick Coupler Male features a 1/4 flow 90-degree elbow design, crafted with a durable Acetal body and a Buna O-ring for reliable sealing. This versatile coupler is available with either a 1/4 inch or 3/8 inch barb, providing flexibility for various applications. Additionally, it can be supplied with or without a shutoff mechanism, catering to different operational needs.

NON-VALVED	VALVED	TUBE SIZE	LENGTH	WIDTH
40AC-PB4-04	40ACV-PB4-04	1/4 BARBED	1.10NV/1.35V	.63
40AC-PB4-06	40ACV-PB4-06	3/8 BARBED	1.10NV/1.35V	.63



40AC PB9 SERIES

40AC Insert is designed with a reliable compression fitting, making it suitable for both 1/4 inch and 3/8-inch OD Poly Tubing. This insert features a nickel-plated nut, which enhances its durability and resistance to corrosion. The robust construction ensures a secure and leak-free connection, making it ideal for various applications requiring high performance and reliability.

NON-VALVED	VALVED	TUBE ID/OD	LENGTH	WIDTH
40AC-PB9-04	40ACV-PB9-04	.170 ID/ .250 OD	1.25NV/1.89V	.63
40AC-PB9-06	40ACV-PB9-06	.250 ID/.375 OD	1.40NV/1.83V	.63



40AC S18 ACETAL PANEL MOUNT PUSH-IN

1/4 Flow Acetal, Panel Mount for 1/4 OD Tubing

Nickel Plated Nut

Stainless Latch and Spring

NON-VALVED	VALVED	TUBE OD	LENGTH	WIDTH
40AC-S18-04	40AC-S18-04	.250 OD	1.93	.75




40AC PB18 PUSH IN SERIES

The 40AC PB18 Series is a 1/4 Flow Insert Panel Mount with a 1/4 OD push to connect. A 1/4 OD tubing is available with a valve or without. It has a nickel-plated nut.

NON-VALVED	VALVED	TUBE OD	LENGTH	WIDTH
40AC-PB18-04	40ACV-PB18-04	.250 OD	1.88NV/2.03V	.70

40AC PB8 PANEL MOUNT INSERT COMPRESSION



40 Series insert, Panel mount with Compression Fitting. Available with Compression fitting for 1/4 or 3/8 OD tubing.

Nickel-plated brass panel nut and compression fitting

FDA/NSF Buna O-ring.

NON-VALVED	VALVED	TUBE ID/OD	LENGTH	WIDTH
40AC-PB8-04	40ACV-PB8-04	.170 ID/.250 OD	1.77"NV/ 1.91"V	.63
40AC-PB8-06	40ACV-PB8-06	.250 ID/.375 OD	1.90"NV/ 2.04"V	.63

40AC PB16 ACETAL INSERT THREADED ELBOW



40 Series Insert, 90-degree, 1/4 Inch Pipe Thread

Available with and w/o Shut off.

NON-VALVED	VALVED	THREAD	LENGTH	WIDTH
40AC-PB16-04	40ACV-PB16-04	1/4	1.20NV/1.35 V	.70



40AC PB2 SERIES

40 Series Insert with barbs of 1/4, 5/16, and 3/8.

Available with and w/o Shut off.

NON-VALVED	VALVED	BARB	LENGTH	WIDTH
40AC-PB2-04	40ACV-PB2-04	1/4	1.25NV/1.94V	.70
40AC-PB2-05	40ACV-PB2-05	5/16	1.25NV/1.94V	.70
40AC-PB2-06	40ACV-PB-06	3/8	1/25NV/1.94V	.70



40AC S9 SOCKET WITH COMPRESSION FITTING

40 Series, 1/4 flow, Socket with Compression Fitting for of 1/4, and 3/8 OD Polytube.

Available with and w/o Shut off.

Stainless Steel Latch and spring. Nickel Plated Brass compression nut.

NON-VALVED	VALVED	TUBE ID/TUBE OD	LENGTH	WIDTH
40AC-09-04	40ACV-09-04	.170 ID/.250 OD	1.85"	.75"
40AC-09-06	40ACV-09-06	.250 ID/ .375 OD	1.85	.75



40AC S8 PANEL MOUNT COMPRESSION FITTING

40 Series Socket, Panel Mount with Compression Fitting for 1/4 OD and 3/8 OD Tubing.

Available with or without a shut off. Compression Nut is Nickel-Plated Brass. Stainless Steel Latch and spring.

Used with a .688 Thru hole. Nickel Plated Brass Panel nut is a 13/16 Hex with 11/16-24 threads.

NON-VALVED	VALVED	TUBE ID/OD	LENGTH	WIDTH
S40AC-S8-04	S40ACV-S8-04	.170 ID .250 OD	1.87	.75
S40AC-S8-06	S40ACV-S8-06	.250 ID .375 OD	1.87	.75



40AC S3 SERIES

40 Series Socket Panel Mount with barbs of 1/4, 5/16, and 3/8.

Available with and w/o Shut off.

Stainless Steel Latch and spring. Nickel Plated Brass Nut.

NON-VALVED	VALVED	TUBE SIZE	LENGTH	WIDTH
40AC-S3-04	40ACV-S3-04	1/4" BARB	1.90"	.75"
40AC-S3-05	40ACV-S3-05	5/16" BARB	1.90"	.75"
40AC-S3-06	40ACV-S3-06	3/8" BARB	1.90"	.75"



40AC S2 BS SERIES

1/4 flow Socket with barbs of 1/4, 5/16 and 3/8.

Available with and w/o Shut off.

Stainless Steel Latch and Spring.

NON-VALVED	VALVED	BARB SIZE	LENGTH	WIDTH
40AC-S2-04	40ACV-S2-04	1/4" ID	1.90"	.75"
40AC-S2-05	40ACV-S2-05	5/16" ID	1.90"	.75"
40AC-S2-06	40ACV-S2-06	3/8" ID	1.90"	.75"



40AC S1 MALE THREADED SOCKET

40 Series 1/4 flow Socket with 1/4 and 3/8 NPT thread. 1/4 and 3/8 BSPT also.

The product is available with and w/o valved shutoffs.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH
40AC-S1-04	40ACV-SB1-04	1/4" NPT	1.15"	.75"
40AC-S1-04BSPT	40ACV-S1-04BSPT	1/4" BSPT	1.15"	.75"
40AC-S1-06	40ACV-S1-06	3/8" NPT	1.15"	.75"
40AC-S1-06BSPT	40ACV-A1-06BSPT	3/8"BSPT	1.15"	.75"



40AC PB3 SERIES - ACETAL PANEL MOUNT HOSE BARB PLUG

40 Series Insert Panel Mount with barbs of 1/4, 5/16, and 3/8.

Available with and w/o Shut off.

Stainless Steel Latch and spring. Nickel Plated Brass nut.

NON-VALVED	VALVED	TUBE SIZE	METRIC SIZE	L(NV/V)	WIDTH	HEIGHT
40AC-PB3-04	40ACV-PB3-04	1/4" ID	6.4 MM ID	1.86"/ 2.01"	.75"	.75"
40AC-PB3-05	40ACV-PB3-05	5/16" ID	7.9 MM ID	1.91"/ 2.05"	.75"	.75"
40AC-PB3-06	40ACV-PB3-06	3/8" ID	9.5 MM ID	1.86"/ 2.01"	.75"	.75"



40AC PB10 PTF SERIES

The 40AC PB10 PTF Series is an Acetal 1/4 Flow, 90-degree male insert with Brass Plated Compression Fitting for use with Plastic Tubing 1/4 OD and 3/8 OD. Inserts available with or w/O valved shutoff. Compatible with all 40 series Couplers.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	HEIGHT
20AC-PB10-025	20ACV-PB10-025	5/32" OD, .10" ID	4.0 MM OD, 2.5 MM ID	1.09"/1.20"	.50"	.99"
20AC-PB10-04	20ACV-PB10-04	1/4 OD", .17" ID	6.4 MM OD, 4.3 MM ID	1.09"/1.20"	.50"	1.02"



40AC PB1 SERIES - ACETAL MALE THREAD PLUG

The 40AC PB1 Series is a Male Thread Plug with Pipe Threads of 1/4 and 3/8. This product is produced with a natural Acetal (POM) thermoplastic. Also, BSPT is available and an optional shutoff. Furthermore, this acetal male thread plug offers an easy way to connect NPT threaded piping to other similar quick couplers.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	HEIGHT
40AC-PB1-04	40ACV-PB1-04	1/4" NPT	1.25"/1.65"	.63"	.63"
40AC-PB1-04BSPT	40ACV-PB1-BSPT	1/4" BSPT	1.25"/1.65"	.63"	.63"
40AC-PB1-06	40ACV-PB1-06	3/8" NPT	1.25"/1.65"	.75"	.75"
40AC-PB1-06BSPT	40ACV-PB1-06BSPT	3/8" BSPT	1.25"/1.65"	.75"	.75"



40AC PB17 SERIES

40 Series Insert for use with 1/4 OD tubing. Push-in connection of Acetal thermoplastic.

Available with or w/o valved shutoff.

The operating pressure is 120 psi with a temperature rating of -40° F to 180° F.

NON-VALVED	VALVED	TUBE SIZE	LENGTH	WIDTH	HEIGHT
40AC-PB17-04	40ACV-PB17-04	1/4" OD	1.81"/1.97"	.70"	.70"



50AC ACETAL QUICK CONNECT

50AC ACETAL QUICK CONNECT

Discover the versatility and reliability of our 50AC Acetal Quick Connects, designed to meet the demands of your specific applications. Engineered for performance and ease of use, these quick connects provide secure and efficient connections, ensuring seamless integration into your workflow.



50AC PB1 SERIES - THREADED INSERT

50AC Quick Coupler Acetal Fitting Threaded Inserts, Two thread sizes available, 1/4 and 3/8 NPT. For use with the all 50 series female couplers.

Use with either liquid or gas—1/4" diameter flow path

- Acetal (POM) durable body, with FDA/NSF Buna O-rings for durability and compatibility
- Mix and match available to valved and non-valved coupler bodies to meet your flow path.
- Operating Pressure Vacuum to 120 PSI

NON VALVED		Valved
50AC-PB1-04	50ACV-PB1-04	1/4 MNPT
50AC-PB1-06	50ACV-PB1-06	3/8 MNPT



50AC SERIES PCM ACETAL

This 1/4-inch stem is designed to be compatible with both the 50 Series and PCM Series, making it a versatile choice for various applications. It is specifically engineered for use with Acetal Quick Couplers, ensuring a secure and efficient connection. The high-quality construction of the stem guarantees durability and reliability, making it suitable for demanding environments.



50AC S2 SERIES

50AC All plastic Quick Coupler Body, Acetal Fitting, Three Barb sizes available, 1/4, 5/16, and 3/8. For use with the all-plastic series male inserts only.

Long Body series is offered in Valved and non-valve sockets.

1/4" diameter flow path

- Acetal (POM) durable body, and latch.
- Operating Pressure Vacuum to 120 PSI

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
50AC-S2-04LB	50ACV-SB2-04	1/4" ID	6.4 MM	2.02"	.75"	.94"
50AC-S2-05LB	50ACV-SB2-05	5/16"	7.9 MM	2.02"	.75"	.94"
50AC-S2-06LB	50ACV-SB2-06	3/8" ID	9.5 MM	2.02"	.75"	.94"

All Plastic socket with barbed connections for 1/4, 5/16 and 3/8 Tubing



50AC S8 SERIES

50AC S8 Series are acetal 1/4 flow sockets with a plastic thumb latch panel mount, PTF Plastic Tubing: Ferrule-less gripper, for an easy quick-release alternative. Furthermore, the operating pressure of these quick couplers is 120psi and the temperature range is -40 °F to 180°F.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
50AC-S8-04	50ACV-SB8-04	1/4" OD, .17" ID	6.4 MM OD, 4.3 MM ID	1.97"	.90"	1.05"
50AC-S8-06	50ACV-SB8-06	3/8" OD, .25" ID	9.5 MM OD, 6.4 MM ID	2.10"	.90"	1.05"



50AC-S3 SERIES

50AC-S3 Series with a plastic-latch Quick Couplers has a 1/4" nominal flow. They are made of White Acetal with a plastic thumb latch coupler and a Buna O-ring insert standard. Also, the temp ranges are -40° F to 180°F for Acetal.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
50AC-S3-04	50ACV-SB3-04	1/4" ID	6.4" MM ID	2.10"	.90"	1.05"
50AC-S3-05	50ACV-SB3-05	5/16" ID	7.9" MM ID	2.10"	.90"	1.05"
50AC-S3-06	50ACV-SB3-06	3/8" ID	9.5" MM ID	2.10"	.90"	1.05"



50AC S1 SERIES

50AC S1 Series is a plastic-latch quick-coupler that has a 1/4" nominal flow. They are made of acetal. These units are available in male pipe thread, Barb and ferrule-less polytube connectors (PFT), and push-in connectors. Coupler bodies and inserts are open flow as a standard, with optional shutoff units. O-rings are FDA/NSF Grade Buna Temperature range is -40° F to 180° F and the pressure rating is 120 psi. Available in Polypropylene.

NON-VALVED	VALVED	THREAD SIZE	LENGTH	WIDTH	HEIGHT
50AC-S1-04	50ACV-SB1-04	1/4 NPT	1.40	.75	.94
50AC-S1-06	50ACV-SB1-06	3/8 NPT	1.40	.75	.94



POLYPROPYLENE QUICK CONNECTS

POLYPROPYLENE QUICK CONNECTS

Pneuline Supply offers a wide variety of different quick connects constructed from medical grade, gamma sterilizable polypropylene.



TL SERIES

TL Series, a meticulously crafted plastic thumb latch, seamlessly combines form and function. 5/32 size available.



20 IHBS SERIES

Quick Coupler. Grey chemical-resistant Polypropylene, 1/8 Flow.



50PPV SE3 SERIES

The 50PPV SE3 Series is made with a medical grade, gamma sterilizable polypropylene these couplers are ideal for medical applications where greater chemical resistance is needed. In addition, this coupler has a plastic thumb latch for a comfortable release every time!

VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
50PPV-SE3-04	1/4" ID	6.4 MM ID	2.14"	1.00"	.94"
50PPV-SE3-06	3/8" ID	9.5 MM ID	2.14"	1.00"	.94"

PANEL MOUNT SOCKET SEALING GASKET

PART NO.	MATERIAL	DIAMETER	THICKNESS
C11376	EPDM	1.00" OD	.08"



20PP PE2 SERIES

The 20PP PE2 Series is made from medical-grade gamma sterilizable polypropylene, offering greater chemical resistance. In addition, this material has a temperature range of 32°F to 160°F and a max operating pressure of 120psi.

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	LENGTH
20PP-PE2-01	20PPV-PE2-01	1/16" ID	1.6 MM ID	.80"/1.48"	.55"	.55"
20PP-PE2-01MALD	20PPV-PE2-01MALD	1/16" ID	1.6 MM ID	.80"/1.48"	.55"	.55"
20PP-PE2-02	20PPV-PE2-02	1/8" ID	3.2 MM ID	.97"/1.65"	.55"	.55"
20PP-PE2-02MALD	20PPV-PE2-02MALD	1/8" ID	3.2 MM ID	.97"/1.65"	.55"	.55"

NON-VALVED	VALVED	TUBE SIZE	METRIC TUBE	L(nv/v)	WIDTH	LENGTH
20PP-PE2-04	20PPV-PE2-04	1/4" ID	6.4 MM ID	1.12"/1.80"	.55"	.55"
20PP-PE2-04MALD	20PPV-PE2-04MALD	1/4" ID	6.4 MM ID	1.12"/1.80"	.55"	.55"
40PP-PE2-04	40PPV-PE2-04	1/4" ID	6.4 MM ID	1.25"/1.94"	.70"	.70"
40PP-PE2-04MALD	40PPV-PE2-04MALD	1/4" ID	6.4 MM ID	1.25"/1.94"	.70"	.70"
40PP-PE2-06	40PPV-PE2-06	3/8" ID	9.5 MM ID	1.25"/1.83"	.70"	.70"
40PP-PE2-06MALD	40PPV-PE2-06MALD	3/8" ID	9.5 MM ID	1.25"/1.83"	.70"	.70"
50PPX-PE2-04	50PPV-PE2-04	1/4" ID	6.4 MM ID	1.89"/2.04"	.70"	.70"
50PPX-PE2-06	50PPV-PE2-06	3/8" ID	9.5 MM ID	1.76"/1.91"	.70"	.70"



GREY POLYPROPYLENE INLINE HOSE BARB SOCKET

We offer grey medical-grade polypropylene inline hose barb sockets with similar quick coupling adapters. This polypropylene material is gamma sterilizable offering a greater chemical resistance.

VALVED	TUBE SIZE	METRIC TUBE	LENGTH	WIDTH	HEIGHT
50PPV-SE2-04	1/4" ID	6.4 MM ID	2.01"	.76"	.94"
50PPV-SE2-06	3/8" ID	9.5 MM ID	2.01"	.76"	.94"



GREY POLYPROPYLENE MALE THREAD PLUG

Our polypropylene fittings are made from a medical grade, gamma serializable polypropylene offering a greater chemical resistance. These couplings are available in both grey polypropylene and almond-colored polypropylene.

NON-VALVED	VALVED	THREAD SIZE	L(nv/v)	WIDTH	HEIGHT
20PPX-PE1-02	20PPV-PE1-02	1/8" NPT	1.27"/1.39"	.50"	.50"
20PPX-PE1-02MALD	20PPV-PE1-02MALD	1/8" NPT	1.27"/1.39"	.50"	.50"
40PPX-PE1-04	40PPV-PE1-04	1/4" NPT	1.50"/1.65"	.63"	.63"
40PPX-PE1-04MALD	40PPV-PE1-04MALD	1/4" NPT	1.50"/1.65"	.63"	.63"
50PPX-PE1-04	50PPV-PE1-04	1/4" NPT	1.60"/1.75"	.63"	.63"
50PPX-PE1-06	50PPV-PE1-06	3/8" NPT	1.60"/1.75"	.75"	.75"

SBLF AND SBLM SERIES

SBLF and SBLM are quick-connect couplers that have a side latch. It is available in several colors of Nylon and is equipped with Buna-N O-rings. Single barb sizes available are 1/8" and 3/16".



SKU	DESCRIPTION
LDF-LDPE	Female LDPE Lab Disconnect
LDF-PP	Female Polypropylene Lab Disconnect
LDF-PP-CLR	Female Polypropylene Clear Lab Disconnect
LD-F-LDPE	Male/Female LDPE Complete Lab Disconnect
LD-M-LDPE	Male LDPE Lab Disconnect
LD-M-NB-PP	Male No-Barb Polypropylene Lab Disconnect