



METAL CHECK VALVES

METAL CHECK VALVES

Metal inline valves of brass, aluminum, and stainless steel are provided in ball check, piston, and poppet styles. These valves are used in agricultural, food, beverage water, and medical applications. Most products are made with varying thread designs.



BALL CHECK VALVES

BALL CHECK VALVES

Ball Check Valves can be utilized in many applications. They are used for preventing backflow in a pipeline system.

BLC SERIES



BLC Ball check valves. Brass and 303 Stainless Steel bodies in three sizes: 10-32 Unf Female, 1/8 MNPT, and 1/4 MNPT.

Also adapters of 1/8 Female to 1/8 Male and 1/4 Fnpt by 1/4 Mnpt.

304 Ball and springs of 2, 10, 15 PSI Cracking pressure for except 1/4 size is not available with 10 PSI

SKU	Description
BLC-1032F-2	10-32 Female 2 psi Brass Check Valve
BLC-1032F-10	10-32 Female 10 psi Brass Check Valve
BLC-1032F-15	10-32 Female 15 psi Brass Check Valve
BLC-18M-2	1/8 inch Male to Male Brass 2 psi Chec k Valve
BLC-18F18M-2	10-32 Female 2 psi Brass Check Valve
BLC-18F18M-SS	1/8 inch Female to Male Stainless Steel Check Valve No Spring
BLC-18F18M-10	1/8 inch Female to 1/8 inch Male Brass Check Valve 10 PSI
BLC-18F18M-SS-10	1/8 inch Female to Male 303 Stainless Steel 10 psi Check Valve
BLC-14-15	1/4 inch Male to Male Brass Check Valve 15 psi

SBCV 3000 SERIES



Brass Ball check valves with maximum operating pressure of 3000 PSI. 1/4 MNPT, or 1/4 FNPT Inlet and Outlet.

3/8 MNPT, or 3/8 FNPT Inlet and Outlet.

Seals of Buna/EPDM, and FKM. Electroless nickel plating is optional. Overall cracking pressure is .5 PSI, 1, 3, 6, or 10 PSI standard.

[table "PSCV3000" not found /]

EVCK SERIES- BALL CHECK VALVE



Our EVCK Series Anti-Siphon Ball Check Valves for gasoline applications. These Brass valves are available 1/4 NPTF by 1/4, 5/16 or 3/8 Barb, 1/4 NPTF by 1/4 or 3/8,

45 % Male Flare, 1/4 NPTF by 1/4 NPTF and 1/4 NPTF by 1/4 NPTF Female. These 1/4 valves offer a 30 GPH flow at -1.5 PSI

The 3/8 NPTF threads offer a flow of 50 GPH at -1.5 PSI. The sizes are 3/8 Male NPTF by 3/8, 1/2 or 5/8 Hose Barb. 3/8 Male NPTF by 3/8 Male Flare 45%, 3/8 NPTF both ends, and a 3/8 Male NPTF by 3/8 NPTF Female threads.

1/2 Inch connections offer a 75 GPH Flow Rate at -1.5 PSI. Sizes are 1/2 Male NPTF by 3/8 or 1/2 Hose Barb or 1/2 Male NPTF both ends that is available only in brass.

Available in Brass or Aluminium (except Flare fittings) with 300 Stainless Steel ball seats, ball and springs.

SKU	Description
EVCK-4M	1/4 inch Male by 1/4 inch Male Ball Check Valve
EVCK-4M4B-B	1/4 inch Male by 1/4 inch Barb Ball Check Valve
EVCK-4M4B-AL	1/4 Inch Male by 1/4 inch Barb Ball Check Valve Aluminum
EVCK-4M5B	1/4 inch Male by 5/16 inch Barb Ball Check Valve
EVCK-4M6B	1/4 inch Male by 3/8 inch Barb Ball Check Valve
EVCK-4M4F	1/4 inch Male by 1/4 inch Female Ball Check Valve
EVCK-6M	3/8 inch Male by 3/8 inch Male Ball Check Valve
EVCK-6M6B	3/8 inch Male by 3/8 inch Barb Ball Check Valve
EVCK-6M8B	3/8 inch Male by 1/2 inch Barb Ball Check Valve
EVCK-6M10B	3/8 inch Male by 5/8 inch Barb Ball Check Valve
EVCK-6M6F	3/8 inch Male by 3/8 inch Female Ball Check Valve
EVCK-8M	1/2 inch Male by 1/2 inch Male Ball Check Valve (brass only)
EVCK-8M6B-AL	1/2 inch Male by 3/8 inch Barb Ball Check Valve (aluminum only)
EVCK-8M8B	1/2 inch Male by 1/2 inch Barb Ball Check Valve (Brass Only)




CMCV SERIES

The CMCV Series Brass Ball Check Valves are compression fittings. This series has Tube OD of 1/8 inch, 1/4 inch, and 3/8 inch. Male NPT thread sizes of 1/8 inch and 1/4 inch are available. The working pressure for the 1/8 inch tube OD is 400 psi, for the 1/4 inch it is 300 psi, and for the 3/8 inch, it is 200 psi. The temperature range is -65° F to 250° F at maximum operating pressures.

SKU	Description
CMCV-14C2M	1/4 inch by 1/8 inch NPT 3 psi Brass Compression Check Valve
CMCV-18C2M	1/8 inch Brass 3 psi by 1/8 inch NPT Brass Compression Check Valve
CMCV-2M14C	1/8 inch NPT by 1/4 inch OD tube 3 psi Brass Compression Check Valve
CMCV-2M18C	1/8 inch NPT by 1/8 inch OD Tube 3 psi Brass Compression Check Valve
CMCV-38C4M	3/8 inch OD tube 3 psi by 1/4 inch NPT Brass Compression Check Valve
CMCV-4M38C	1/4 inch NPT by 3/8 inch OD tube, 3 psi Brass Compression Check Valve


BCV SERIES



The BCV .187 flow thru Series is a Brass Ball Check Valve, with inlet and outlet sizes of 1/4 inch MNPT both ends, 1/4 inch Male Flare both ends, or a 1/4 MNPT to 1/4 FNPT flow only. This Check Valve has no elastomers to create a seal. It will have a positive seal only at high back pressure, so some leakage may bi-pass the seat in low-pressure applications. The cracking pressure on the 302 Stainless Steel spring is 1 psi (standard), 3, 5, 10, 14 and 18 psi. Maximum operating pressure is 2500 psi and the maximum operating temperature is 250° F.

The .280 flow thru series is available in 1/4 or 3/8 inch Male and Female NPT threads, and sealing materials are Buna, EPDM or Fluoroelastomer. The cracking pressure on the 302 Stainless Steel spring is 1/2 psi, 1 (standard), 3, 6, 10, 30, 40, 55 and 70 psi. The maximum operating pressure is 3000 psi and the maximum operating temperature is 250° F for Buna seals. These Check Valves are designed for high press applications up to 3000 PSI.

SKU	Description
BCV-14MF-1	1/4 inch MNPT by 1/4 inch MFNPT Ball Check Valve 1 # Spring No Seals
BCV-14M-5	1/4 inch MNPT by 1/4 inch MNPT Ball Check Valve No Seals
BCV-14M-303-5	1/4 inch MNPT by 1/4 inch MNPT Ball Check Valve SS 5# Spring No Seals
SBCV-14M-5-B	1/4 inch MNPT Ball Check 5# spring Buna Seal
SBCV-14F-1-E	1/4 inch FNPT Ball Check Valve 1# spring EPDM
SBCV-38F-1/3-E	3/8 inch FNPT Ball Check Valve 1/3 # Spring EPDM
SBCV-38M-5-V	3/8 inch MNPT Ball Check Valve 5# Spring Fluoroelastomer
SBCV-12M-5-V	1/2 inch MNPT Ball Check Valve 5# Spring Fluoroelastomer
SBCV-12F-1-E	1/2 inch FNPT Ball Check Valve 1# spring EPDM
SBCV-12FM-5-V	1/2 inch FNPT by 1/2 inch MNPT Ball Check Valve 5# Spring Fluoroelastomer
SBCV-12MF-5-E	1/2 inch MNPT by 1/2 inch FNPT Ball Check Valve 5# Spring EPDM
SBCV-34F-5-V	3/4 inch FNPT Ball Check Valve, 5# Spring, Fluoroelastomer only

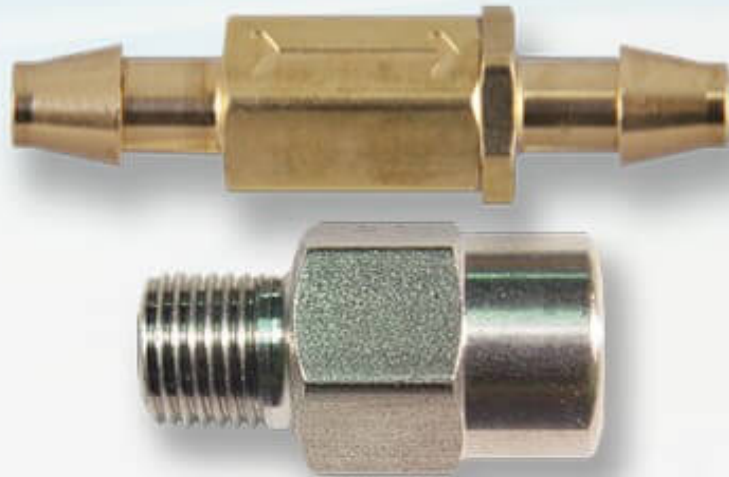

METAL PISTON CHECK VALVES

METAL PISTON CHECK VALVES

Pneuline offers Metal Piston Check Valves perfect for Industrial applications, Power plants, and High-temperature services. Metal Piston Check Valves are Gravitational closure and quick closing.


CLCV SERIES - BRASS CHECK VALVES



The CLCV Series Brass Check Valves have 10-32 inch ports, a Nitrile seal, and a Stainless Steel spring. It permits flow in only one direction and is used for air and hydraulics. The input psi is 300 maximum. The crack pressure is 1/2 psi and the temperature range is 32° F to 230° F. The 1/8-inch valve has a maximum input pressure of 1000 psi. Otherwise, all other attributes are the same as the 10-32 inch valve.

SKU	Description
CLCV-10F10F	10-32 Female to Female Brass Poppet Check Valve
CLCV-10F10M	10-32 Female to Male Brass Poppet Check Valve
CLCV-10M10M	10-32 Male to Male Brass Poppet Check Valve
CLCV-10M10F	10-32 Male to Female Brass Poppet Check Valve
CLCV-18F	1/8 inch Female to Female Brass Poppet Check Valve

BPCV SERIES




The BPCV Series Brass Piston Check Valves with nickel plate, are available with 10/32 Female UNF threads. Added to this main configuration is male 10/32 fittings or 1/16, 1/8, 3/32, inch barbs added.

Seal options are Buna-N, EPDM and Viton®. Spring materials are Stainless Steel or Hastelloy. The valve is also available without a spring. The maximum operating pressure is 125 psi. The flow rate is 2.5 SCFM at 50 psi. Larger size made from machined brass are 1/8, 3/16, 1/4 and 5/16 barbs. These larger sizes, see optional products in the gallery, will handle 125 PSI.

SKU	Description	Inlet	Outlet
BPCV-1032F-NS	Brass Piston No Spring	10/32 F	10/32 F
BPCV-10M10F-1-B	Brass Piston 1 PSI, Buna Seals	10/32 Male	10/32 Female
BPCV-10M10F-4.5-EPDM	Brass Piston 4.5 PSI EPDM Seals	10/32 Male	10/32 Female

SKU	Description	Inlet	Outlet
BPCV-10F1B-1-EPDM	Brass Piston 1 PSI EPDM Seals	10/32 Female	1/16 Barb
BPCV-332B-10M-H1-V	Brass Piston Check Valve, 1PSI, Hastelloy FKM	3/32 Barb	10/32 Male
BPCV-1B-332B-1-B	Brass Piston 1 PSI EPDM Seals	1/16 Barb	3/32 Barb
BPCV-2B-E1	Brass Piston 1 PSI EPDM Seals	1/8 Barb	1/8 Barb
BPCV-2B-H1-V	Brass Piston Check Valve, 1PSI, Hastelloy FKM	1/8 Barb	1/8 Barb
BPCV-3B3B-E1	Brass Machined 3/16 Piston 1 PSI EPDM	3/16 Barb Machined	3/16 Barb Machined
BPCV-5B5B-H4.5-V	Brass Machined Piston 4.5 Hastelloy FKM	5/16 Barb Machined	5/16 Barb Machined

PSCV SERIES



The PSCV Series Brass or Stainless Steel Piston Check Valves ensures a positive bubble-tight seal. They have a cracking pressure of 1 psi, a maximum pressure of 500 psi, and a maximum working temperature of 250° F. The standard unit is Brass with a 302 Stainless Steel spring and Steel retainer. Optional springs of 3, 5, 9, 15, 20, 25 psi. Also available in a 316 Stainless Steel body (shown) with a Hastelloy® spring. 1, 3, 15, and 25 psi. Seals available are Buna, EPDM, or FKM.

SKU	Description
PSCV-12F	1/2 FNPT Brass Piston Check Valve with Buna Seal
PSCV-14F	1/4 FNPT Brass Piston Check Valve with Buna Seal
PSCV-14FM	1/4 FNPT 1/4 MNPT Brass Piston Check Valve
PSCV-14M	1/4 MNPT Brass Piston Check Valve
PSCV-18F	1/8 FNPT Brass Piston Check Valve
PSCV-18FM	1/8 FNPT 1/8 MNPT Brass Piston Check Valve
PSCV-18M	1/8 MNPT Brass Piston Check Valve
PSCV-34F	3/4 FNPT Brass Piston Check Valve
PSCV-38F	3/8 FNPT Brass Piston Check Valve
PSCV-38FM	3/8 FNPT 3/8 MNPT Brass Piston Check Valve
PSCV-18F-SS	1/8 FNPT 316 Stainless Steel Piston Check Valve
PSCV-18FM-SS	1/8 FNPT 1/8 MNPT 316 Stainless Steel Piston Check Valve
PSCV-34F-SS	3/4 FNPT 316 Stainless Steel Piston Check Valve





METAL POPPET CHECK VALVES

METAL POPPET CHECK VALVES

Discover premium metal poppet check valves—engineered for durability, reliability, and optimal performance. Our valves are built to withstand tough conditions and ensure smooth, efficient flow control.

NCV CHECK VALVE SERIES



The NCV Series Nickel-Plated Brass Poppet Check Valve has options of Buna-N, EPDM or FKM seals. The operating pressure is 0 to 125 psi and the flow rate ranges from 2.5 to 9.5 scfm. Input and output port sizes are 10-32 inch UNF and 1/16 inch Barb.

SKU	Description
NCV-10F10F	10-32 Female to Female Nickel-Plated Poppet Check Valves
NCV-10F10M	10-32 Female to Male Nickel-Plated Poppet Check Valves
NCV-10F1B	10-32 Female 1/16 inch Barb Nickel-Plated Poppet Check Valves
NCV-10M10F	10-32 Male to Female Nickel-Plated Poppet Check Valves
NCV-10M1B	10-32 Male 1/16 inch Barb Nickel-Plated Poppet Check Valves
NCV-1B1B	1/16 inch Barb to 1/16 inch Barb Nickel-Plated Poppet Check Valves

PPCV SERIES



The PPCV Series Brass Poppet Check Valve has inlet sizes of 1/8, 1/4, 3/8, 1/2, 3/4 and 1 Inch Female NPT threads.

Also available in 3/8, and 1/2 inch Male NPT threads.

Outlet sizes are 1/4 inch, 3/8 inch, 1/2 inch, 3/4 inch, 1 Inch Female NPT threads.

Flare fittings are 1/4 inch and 3/8 inch Male Flare, and 1/4 inch Female Flare.

Seal options are Buna-N, EPDM and Viton®.

The cracking pressure on the 302 Stainless Steel spring is 1 psi (standard). Maximum operating pressure is 500 PSI for the 1/8 size.

1200 PSI for all the other sizes. The maximum operating temperature is 180° F.

Two sizes of valves, the 3/8 FNPT and the 1-inch FNPT are available in 303 stainless.

SKU	Description
PPCV-18M	1/8 inch MNPT Brass Poppet Check Valve
PPCV-14MFL	1/4 Male Flare to 1/4 Male Flare Brass Poppet Check Valve
PPCV-18M14MFL	1/8 inch MNPT to 1/4 Male Flare Brass Poppet Check Valve
PPCV-14MFL18M	1/4 Male Flare to 1/8 MNPT Brass Poppet Check Valve
PPCV-14MFL18M-NP	1/4 Male Flare to 1/8 MNPT Nickel Plated Brass Poppet Check Valve
PPCV-14F	1/4 inch Female Brass Poppet Check Valve
PPCV-14F-1-V	1/4 inch Female Brass Poppet Check Valve <1 psi FKM Seals
PPCV-14F14MFL	1/4 FNPT to 1/4 Male Flare Brass Poppet Check Valve
PPCV-38MFL	3/8 Male Flare Brass Poppet Check Valve
PPCV-38MF	3/8 MNPT to 3/8 FNPT Brass Poppet Check Valve
PPCV-38F	3/8 FNPT to 3/8 FNPT Brass Poppet Check Valve
PPCV-38F-316SS-V	3/8 FNPT to 3/8 FNPT 316 with Fluorolastomer Seal
PPCV-12M38F	1/2 MNPT to 3/8 FNPT Brass Poppet Check Valve
PPCV-12F	1/2 inch Female Brass Poppet Check Valve
PPCV-12MF	1/2 inch Male 1/2 inch Female Brass Poppet Check Valve
PPCV-34F	3/4 inch Female Brass Poppet Check Valve
PPCV-34M	3/4 inch Male Brass Poppet Check Valve
PPCV-16F-E	1 inch FNPT to 1 inch FNPT Brass with EPDM Seal
PPCV-16F-316SS-v	1 Inch FNPT to 1 Inch FNPT 316 with Fluoroelastomer Seal